ICB Twin Tall Platinum Edn, 120/240V SST

Height: 35.0" Width: 20.2" Depth: 21.9" (88.9cm) (51.3cm) (55.6cm)



Server(s) sold separately

Specifications

Product #: 53400.0101

Water Access: Plumbed

Interface: Wireless

Finish: Stainless

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ² O Temp.	Phase	# Wires plus Ground	Hertz
120/240	25	6000	Yes/	-	280	60°F (15.5°C)	1	3	60

*When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements

CAD Drawings

	U 1		0			
PSI	kPa	Fitting Supplied Water Flow Required (GPM)		2D	Revit	KLC
20-90	138-621	3/8" Male Flare Fitting	1.00			

MARNING: This product can expose you to chemicals including Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle

Last Updated: 03/16/2021

- 4.3" Color Touchscreen aides in customizing recipes, brewing options and control
- SmartWAVE sprayhead technology provides enhanced uniformity of extraction and lime scale reduction
- USB programming for uploading and downloading recipes and software updates, all in less than a minute
- Brews into 2.5 to 3.8L (84 to 128 oz) airpots and 3.8 to 5.7L (1 to 1.5 gallon) Thermofresh servers
- Large 5.6 gallon (21.2L) tank provides back-to-back brewing capacity
- BUNN Infusion Series technology allows for multiple recipes from one footprint
- Energy-saver mode reduces tank temperature during idle periods
- Exclusive Peak Extraction[™] Sprayhead is multi-directional with a 17-hole design to ensure ultimate uniformity of extraction
- Electronic funnel lock prevents removal of the brew funnel until drip- through is complete
- Brew counter keeps track of how many batches are brewed
- Pre-infusion and pulse brew for maximum flavor extraction. Cold brew lockout & digital temperature control further ensure top-notch brewing
- Hot water faucet (supplied for custom installation)
- PROP 65 Warning Decal included in packaging with equipment

Agency:

Funnel: Stainless Steel






Additional Features

the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.



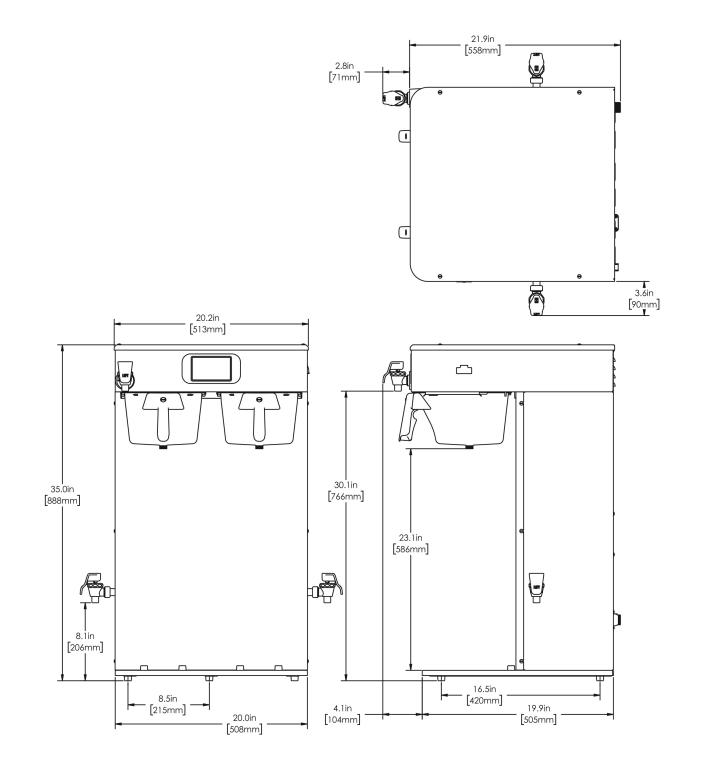

Unit				Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume
English	35.0 in.	20.2 in.	21.9 in.	38.3 in.	23.8 in.	28.4 in.	89.000 lbs	14.917 ft ³
Metric	88.9 cm	51.3 cm	55.6 cm	97.2 cm	60.3 cm	72.1 cm	40.370 kgs	0.422 m³



 BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle
 Last Updated:

 the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
 03/16/2021

 For most current specifications and other info visit bunn.com.
 03/16/2021

Related Products & Accessories: ICB Twin Tall Platinum Edn, 120/240V SST(53400.0101)





Serving & Holding Options: ICB Twin Tall Platinum Edn, 120/240V SST(53400.0101)





BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle Last U the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. 03/16. For most current specifications and other info visit bunn.com.