ICB Twin, 120/208V SST

Height: 26.9" Width: 20.2" Depth: 24.7" (68.3cm) (62.7cm) (51.3cm)



Server(s) sold separately

Specifications

Product #: 53200.0102

Water Access: Plumbed

Interface: Wireless

Finish: Stainless

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ² O Temp.	Phase	# Wires plus Ground	Hertz
120/208	28	6000	Yes/	-	280	60°F (15.5°C)	1	3	60

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements

CAD Drawings

	0		0			
PSI	kPa	Fitting Supplied	Water Flow Required (GPM)	2D	Revit	KLC
20-90	138-621	3/8" Male Flare Fitting	1.00	•		



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

Last Updated: 03/16/2021


- Sleek modernized design language, with rounded angles on the corners and trunk
- Brews into 2.5 to 3.8L (84 to 128 oz)airpots and 3.8 to 5.7L (1 to 1.5 gallon) baseless Thermofresh servers
- Digital readout displays in English, Spanish, or French --- for easier programming and control--- and can show either 'Standard' or Metric measurements. Digital readout also shows machine status, and targeted advertising messages can be programmed for display.
- Large 5.6 gallon (21.2L) tank provides back-to-back brewing capacity
- BUNN Infusion Series technology allows for multiple recipes from one footprint --with three brew buttons and two batch sizes
- · Energy-saver mode reduces tank temperature during idle periods
- Exclusive Peak Extraction™ Sprayhead is multi-directional with a 17-hole design to ensure ultimate uniformity of extraction
- · Electronic funnel lock prevents removal of each brew funnel until drip- through is complete
- USB programming capable
- · Brew counter keeps track of how many batches are brewed
- Pre-infusion and pulse brew for maximum flavor extraction. Cold brew lockout & digital temperature control further ensure top-notch brewing.
- · Hot water faucet (supplied for custom installation)
- Agency not included unless otherwise noted



Additional Features

For most current specifications and other info visit bunn.com.

Funnel: Black Plastic

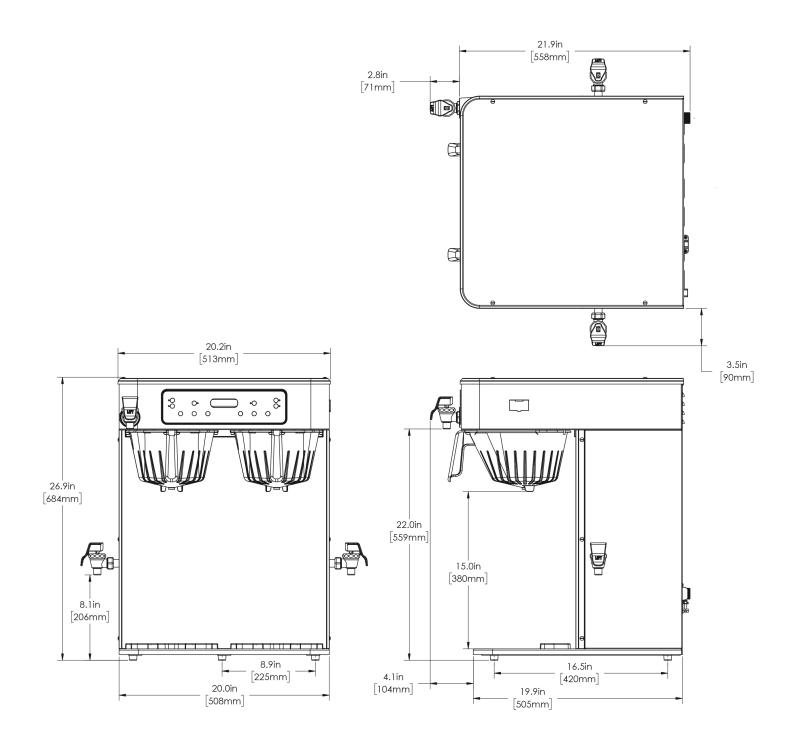

Unit				Shipping					
	Height	Width	Depth	Height	Width	Depth	Weight	Volume	
English	26.9 in.	20.2 in.	24.7 in.	30.0 in.	23.9 in.	28.4 in.	78.460 lbs	11.761 ft ³	
Metric	68.3 cm	51.3 cm	62.7 cm	76.2 cm	60.6 cm	72.1 cm	35.589 kgs	0.333 m³	



 BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle
 Last Updated:

 the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
 03/16/2021

 For most current specifications and other info visit bunn.com.
 03/16/2021

Related Products & Accessories: ICB Twin, 120/208V SST(53200.0102)





Serving & Holding Options: ICB Twin, 120/208V SST(53200.0102)





 BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle
 Last Updated:

 the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
 03/16/2021

 For most current specifications and other info visit bunn.com.
 Comparison of the previously purchased equipment.